

Technical Specification




Positive battery parallel cable



Negative battery parallel cable

Battery Parallel Cable	
Cable type	UL10269-4AWG
Current Rating	100 A
Voltage Rating:	1000V
Temperature rating	105°C
Reference Standard	UL758 UL1581
Conductor	Tinned or bare copper conductor, stranded
Insulation	PVC insulation
Conductor diameter	6.0mm
Conductor cross-sectional area	21.15mm ²
Cable diameter	9.5mm
Copper cable terminal	Amphenol plug

Code	Designation	Length	Color	Copper cable terminal
18-041343-31	160mm Positive battery parallel cable	160mm	Orange	Amphenol plug
18-041344-31	160mm Negative battery parallel cable	160mm	Black	Amphenol plug
18-061230-31	650mm Positive battery parallel cable	650mm	Orange	Amphenol plug
18-061229-31	650mm Negative battery parallel cable	650mm	Black	Amphenol plug
18-011363-31	1300mm Positive battery parallel cable	1300mm	Orange	Amphenol plug
18-011358-31	1300mm Negative battery parallel cable	1300mm	Black	Amphenol plug

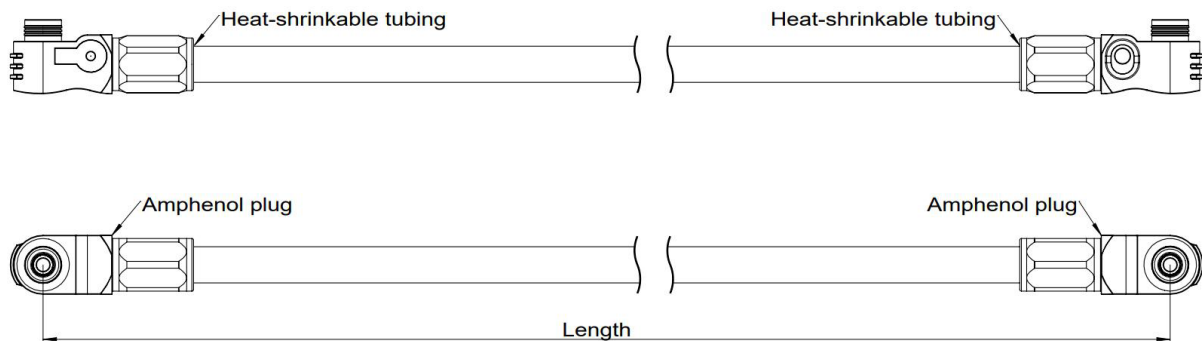

Battery Parallel Cable