

Aerated concrete screw KBRM 8X65

SORMAT CODE 9640075140



Screw anchor for quick and easy fixing into porous base materials

- Self-tapping screw anchors with a coarse thread for push-through installations in porous base materials.
- Can be installed without pre-drilling and plugs directly into the base material. The thread length is 60 mm.
- No special tools nor prescribed tightening torque needed.
- The installation is recommended to be done using a torque controlled machine to avoid over tightening.
- SITAC approval for corrosivity category C4. In indoor, outdoor and industrial use.

PRODUCT OVERVIEW

Other codes	SNRO 1308808 /
Material	Steel, nano coated
Packages	box (bag): 100 / outer carton: 500 / pallet: 28000
Weight	14.1 kg / 1000

APPLICATIONS

- Battens
- Squared timbers
- Sole plates
- Shelves
- Cable racks
- Supports

BASE MATERIALS

ALSO SUITABLE FOR

- Aerated concrete block
- Hollow light expanded clay aggregate block
- Solid light expanded clay aggregate block

APPROVALS / CERTIFICATES



SC0551-16


Technical data

INSTALLATION DETAILS





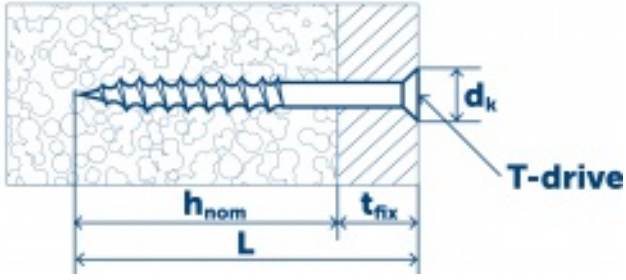

Size	8
Length (L)	65
Drive	T30
Max. fixture thickness (T_{fix})	5

INSTALLATION DETAILS

Nominal setting depth (H_{nom})	60
HEAD DETAILS	
Head diameter ø	12



Performance data

Base material	Load type	Embedment depth (h_{nom})	Load direction	Load value
All <input type="text" value="All"/>				
Aerated concrete AAC 1,5	N _{Rec}	60 mm		0.15 kN
Aerated concrete AAC 2,5	N _{Rec}	60 mm		0.35 kN
Aerated concrete AAC 4,0	N _{Rec}	60 mm		0.60 kN
Solid light expanded clay aggregate fb ≥ 3 MN/m ²	N _{Rec}	60 mm		0.55 kN
Hollow light expanded clay aggregate fb $\geq 2,7$ MN/m ²	N _{Rec}	60 mm		0.55 kN
Light expanded clay aggregate with insulation fb ≥ 4 MN/m ²	N _{Rec}	60 mm		0.55 kN

Installation

