

# ENVIRONMENTAL PRODUCT DECLARATION

In accordance with ISO 14025, ISO 21930 and EN 15804+A2 for:

## PTS, TPE

From

**KNAUF**INSULATION



|                          |                                                                                             |
|--------------------------|---------------------------------------------------------------------------------------------|
| Program:                 | The International EPD® System<br><a href="http://www.environdec.com">www.environdec.com</a> |
| Programme operator:      | EPD International AB                                                                        |
| EPD registration number: | S-P-07480                                                                                   |
| Publication date:        | 2022-11-18                                                                                  |
| Validity date:           | 2027-11-18                                                                                  |

## Programme-related information and verification

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804+A2:2019. For further information about comparability, see EN 15804+A2:2019 and ISO 14025.

|                                        |                                                                                                                                                                                                                                    |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Programme:</b>                      | The International EPD® System<br>EPD International AB<br>Box 210 60<br>SE-100 31 Stockholm<br>Sweden<br><a href="http://www.environdec.com">www.environdec.com</a><br><a href="mailto:info@environdec.com">info@environdec.com</a> |
| <b>EPD registration number:</b>        | S-P-07480                                                                                                                                                                                                                          |
| <b>Published:</b>                      | 2022-11-18                                                                                                                                                                                                                         |
| <b>Valid until:</b>                    | 2027-11-18                                                                                                                                                                                                                         |
| <b>EPD owner</b>                       | Knauf Insulation Sprl<br>Rue de Maestricht 95<br>4600 Visé<br>Belgium                                                                                                                                                              |
| <b>Product Category Rules:</b>         | PCR 2019 :14. Construction products (EN 15804+A2)<br>Version 1.11<br>Sub-PCR-005 Thermal insulation products (EN 16783:<br>2017) Version: 2019-12-20                                                                               |
| <b>Product group classification:</b>   | UN CPC 37                                                                                                                                                                                                                          |
| <b>Reference year for plant data:</b>  | 2018                                                                                                                                                                                                                               |
| <b>Geographical application scope:</b> | Europe                                                                                                                                                                                                                             |

|                                                                                                                                                                             |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CEN standard EN 15804+A2 serves as the Core Product Category Rules (PCR)                                                                                                    |
| Product category rules (PCR): PCR 2019:14. Construction products (EN 15804+A2) Version 1.11<br>Sub-PCR-005 Thermal insulation products (EN 16783: 2017) Version: 2019-12-20 |
| PCR review was conducted by: The Technical Committee of the International EPD@ System                                                                                       |
| Independent third-party verification of the declaration and data, according to ISO 14025:2006.                                                                              |
| <input checked="" type="checkbox"/> EPD process certification <input type="checkbox"/> EPD verification                                                                     |
| Certified by: Bureau Veritas certification Sverige AB SE006629-3                                                                                                            |
| Procedure for follow-up of data during EPD validity involves third party verifier:                                                                                          |
| <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No                                                                                                         |


*An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com).*

## General information

### Information about the company

#### Description of the organisation:

Knauf Insulation has more than 40 years of experience in the insulation industry and is one of the most respected names in insulation worldwide. Knauf Insulation is manufacturing products and solutions mainly in Glass and Rock Mineral Wool, as well as Wood Wool. We operate more than 37 manufacturing sites globally in 15 countries and employ more than 5,000 people.

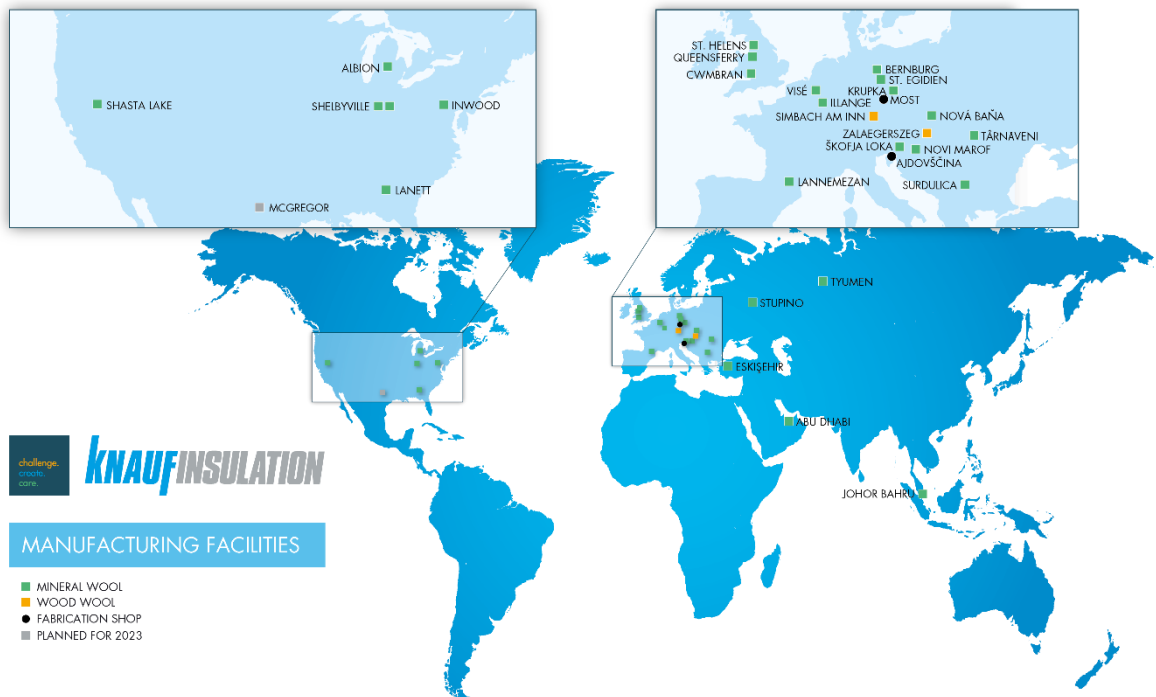

The Headquarters are located in Visé, in Belgium.



## Product-related or management system-related certifications:

All Knauf Insulation sites which are covered by EPD process certification system, including the related site for this EPD, are ISO 9001, ISO 14001, ISO 50001 and ISO 45001 certified under the scope "Design, Development and Production of Insulation Materials and Systems".

Knauf Insulation supports the Ten Principles of the United Nations Global Compact on human rights, labor, environment and anti-corruption.

## Name and location of production site:

The application in construction of the concerned product is Europe. The data utilized for the production stage life cycle assessment is related to production plants located in Nová Baňa (Slovakia).


Zeleznicný rad 78/24 968 01 Nová Bana (Slovakia).

## Information about Rock Mineral Wool production

The Rock Mineral Wool Products for Building Construction are available in the form of slabs, boards, lamellas and rolls. RMW slabs are used as a thermal, acoustical and fire insulation product.

In general, the density for Rock Mineral Wool products ranges from 20 to 200 kg/m<sup>3</sup>. In terms of composition, the inorganic part (92-98%) is composed of volcanic rocks, typically basalt, and some dolomite and with an increasing proportion of recycled material like slags from steel industry or in the form of briquettes, a mix of stone wool scrap, other secondary materials and cement.

The remaining fraction is the thermo set resin binder.

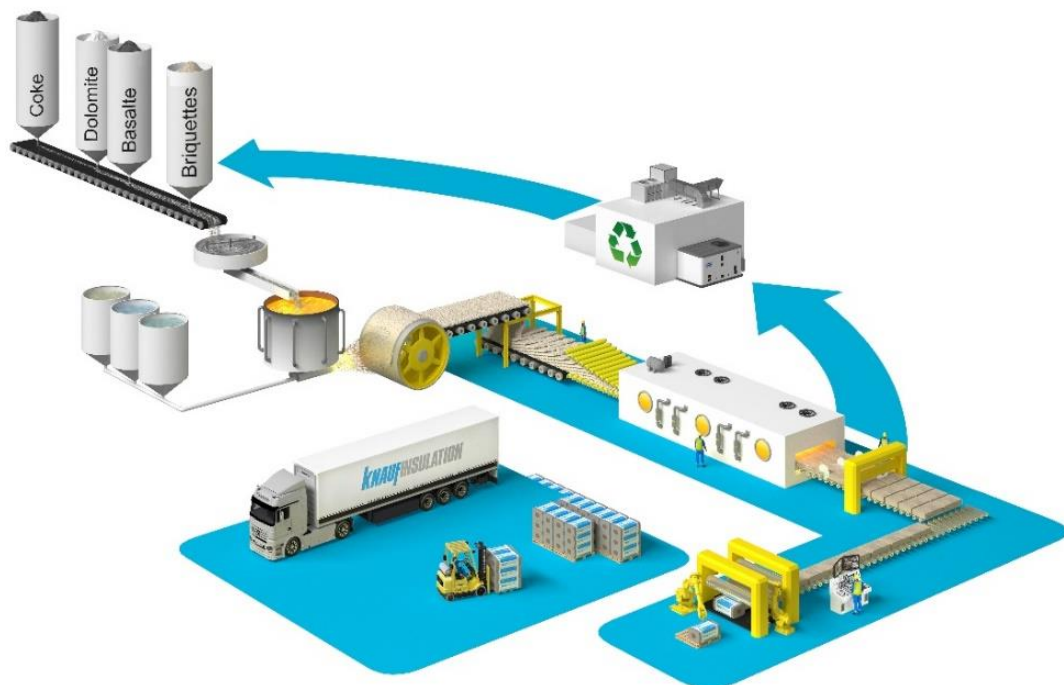

## Product information

**Product name:** PTS, TPE

**Product identification:** The declared insulation PTS, TPE is a compact Rock Mineral Wool, uncoated and unfaced of 1 m<sup>2</sup> (considered for this EPD).

For the placing on the construction products market in the European Union/ EFTA (with exception of Switzerland), the Regulation/ (EU) No 305/2011/ applies. The concerned products need Declarations of Performance /DoP R4308KPCPR taking into consideration the harmonized product standard /EN 13162/ and the /CE-mark/.

**Product description:** The main application for PTS, TPE is in floating floor. They can be used with concrete or anhydrite screed or in dry floating floor with small loading impact.

**UN CPC code:**

37990: Non-metallic mineral products (including mineral wool, expanded mineral materials, worked mica, articles of mica, non-electrical

articles of graphite or other carbon and articles of peat).

**Geographical scope:** The product is manufactured in Nová Baňa (Slovakia), with their related country energy mix for electricity. Regarding the market area, the product is mainly marketed in Europe.

**Energy:**

Residual electricity mix (reference year 2020) and gas inputs (reference year 2018) are taken from Slovakia. 0.277 kg of CO<sub>2</sub> is released for 1 kWh of electricity consumption from Slovakia.

**Technical Characteristics:**

| Parameter                                   | Value                          |
|---------------------------------------------|--------------------------------|
| Thermal conductivity/ EN 12667              | 0.036 W/(mK) at 10°C           |
| Water vapor diffusion resistance (EN 12086) | 1                              |
| Thermal Resistance (ISO 8301)               | 0.83 m <sup>2</sup> K/W        |
| Reaction to fire (EN 13501-1)               | A1                             |
| Declared density range/ EN 1602             | 150 kg/m <sup>3</sup> (+/-10%) |
| Melting point of fibers DIN 4102-17         | ≥ 1000°C                       |

## LCA information

### Functional unit / declared unit

The declared unit is 1m<sup>2</sup> of unfaced and uncoated Rock Mineral Wool PTS, TPE with a R-value of 0.83 m<sup>2</sup>K/W (for a thickness of 150 mm and a declared lambda of 0.036 W/mK).

**Reference service life:** The RSL or durability of PTS, TPE is as long as the lifetime of the building equipment in which it is used (at least 50 years).

### Time representativeness & Information on Specific Data:


Plant production data for the complete year 2018. The reference product groups considered in this EPD are produced in one single manufacturing plant; therefore, variations issue for sites is not relevant.

The data which is used to carry out the LCA calculations contains >90 % specific data and below 10 % generic data.

### Database(s) and LCA software used:

The LCA model, the data aggregation and environmental impacts are calculated with the software GaBi 10.6 and its Content version 2022.1. The impact models used are those indicated in EN 15804:2012+A2:2019.

### System diagram:

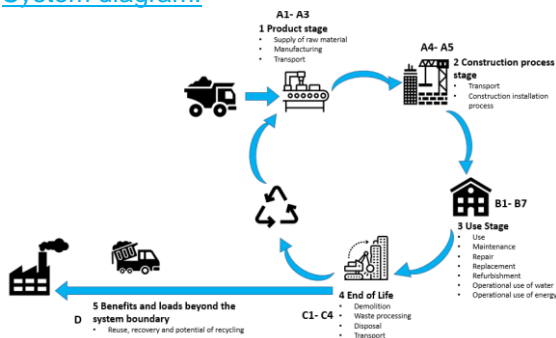

### Description of system boundaries:

The system boundary of the EPD follows the modularity approach defined by the EN 15804:2012+A2:2019.

### The type of EPD is cradle-to-grave.

List and explanation of the modules declared in the EPD.

### The product stage (A1-A3) includes:

- A1 - raw material extraction and processing, processing of secondary material input (e.g. recycling processes),
- A2 - transport to the manufacturer and
- A3 - manufacturing.

This includes provision of all materials, products and energy, packaging processing and its transport, as well as waste processing up to the end-of-waste state or disposal of final residues during the product stage.

The LCA results are given in an aggregated form for the product stage, meaning that the modules A1, A2 and A3 are considered as a unique module A1-A3.

| Product Parameters                                        | Value               |
|-----------------------------------------------------------|---------------------|
| Rock mineral wool weight (without facing/ coating weight) | 4.50 kg             |
| Surface                                                   | 1m <sup>2</sup>     |
| Thickness                                                 | 150 mm              |
| Volume                                                    | 0.03 m <sup>3</sup> |
| Facing/ coating weight                                    | 0 kg                |
| Packaging Plastic sheet                                   | 0.03 kg             |
| Packaging Wooden pallet                                   | 0.23 kg             |

### The construction process stage includes:

- A4 - transport to the construction site and
- A5 - installation into the building.

The transport to the building site (A4) and installation (A5) included in this LCA use the following parameters:

| Parameter                                                                   | Value                                                      |
|-----------------------------------------------------------------------------|------------------------------------------------------------|
| Average transport distance                                                  | 600 km                                                     |
| Type of fuel and vehicle consumption or type of vehicle used for transport. | Truck Euro 6 (28 – 32 t / 22 t payload). 140 L for 100 km. |
| Truck capacity utilization (including 30% of empty returns)                 | 47.13 % of the weight capacity                             |
| Loss of materials in construction site                                      | 2%                                                         |
| Packaging Wooden pallet                                                     | 40% recycled, 60% incinerated                              |
| Packaging Plastic sheet                                                     | 40% recycled, 60% incinerated                              |

The treatment of the packaging waste after the installation of the product (A5) has been considered.

### The Use stage (B1-B7) includes:

- B1: Use
- B2: Maintenance
- B3: Repair

- B4: Replacement
- B5: Refurbishment
- B6: Operational Energy Use
- B7: Operational Water Use

Once installation is complete, no actions or technical operations are required during the use stages until the end of life. Therefore, the mineral wool has no impact (excluding potential energy savings) on this stage.

**The end-of-life stage** includes:

- C1 - de-construction, demolition,
- C2 - transport to waste processing,
- C3 - waste processing for reuse, recovery and/or recycling and
- C4 - disposal.

This includes provision of all transports, materials, products and related energy and water use. The common manual dismantling impact of insulation is considered as very small and can be neglected in C1.

Although Rock Mineral Wool products from Knauf Insulation are partly recycled at their end-of-life, an established collection system does not yet exist. Therefore, the assumption chosen in this study, 100% landfill (C4) after the use phase, is the most conservative approach.

| Parameter                                                                   | Value                                                                                                         |
|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Disposal type (mineral wool)                                                | 100% landfill                                                                                                 |
| Average transport distance waste (C2)                                       | 50 km                                                                                                         |
| Type of fuel and vehicle consumption or type of vehicle used for transport. | Truck-trailer, Euro 3, 34 - 40t gross weight / 27t payload capacity/ 40 L for 100 km. (if 100 % utilization). |
| Truck capacity utilization                                                  | 50 % of the weight capacity                                                                                   |

**Module D** includes reuse, recovery and/or recycling potentials. According to EN 15804:2012+A2:2019 any declared benefits and loads from net flows leaving the product system not allocated as co-products and having passed the end-of waste state shall be included in module D. Benefits considered in module D originate from packaging recycling or incineration.

## Recycled material

For year 2018, the external recycled waste as raw material is 28.22 % originating (mainly) from slags.

## Additional information:

All raw materials for the manufacturing of the declared product, the required energy, water consumption and the resulting emissions are considered into the LCA. Consecutively, the recipe components with a share even less than 1% are included. All neglected processes contribute less than 5% to the total mass or less than 5% to the total energy consumption. For information, the impact of the Rock Mineral Wool plant construction or machines, are not taken into account in the life cycle assessment.

Materials for fixation and installation are not included into this LCA scope. This may lead to the need of additional construction products or materials for which the impact is not included in this EPD and which shall be taken into account at building level. Regarding installation this EPD only includes the environmental impact related to the product itself like material losses and packaging end of life.

Knauf Insulation adopts a “worst case” approach into its EPDs.

Conversion factor for this EPD is 0.22 for 1 kg. In principal, an insulation product should always be characterized by its thickness and an R value, only taking into account the product's weight could lead to wrong interpretation.

## More information:

[www.knaufinsulation.com](http://www.knaufinsulation.com)

## Name and contact information of LCA practitioner:

Clara del Val  
 Knauf Insulation Sprl  
 Rue de Maestricht 95  
 4600 Visé  
 Belgium  
 Contact : sustainability@knaufinsulation.com

Content Declaration

The product does not contain substances on the "Candidate List of Substances of Very High Concern for Authorisation" under the REACH regulation (if above 0.1% of the mass).

| Product components            | Weight %             | Pre-consumer material, weight - % (out of total) | Post- consumer % (out of total) | Renewable material, weight- % (out of total) |
|-------------------------------|----------------------|--------------------------------------------------|---------------------------------|----------------------------------------------|
| Basalt                        | 55 - 60              | 0                                                | 0                               | 0                                            |
| Dolomite - Limestone          | 15 - 20              | 0                                                | 0                               | 0                                            |
| Recovered metallurgical slags | 5 - 30               | 100                                              | 0                               | 0                                            |
| Thermo set resin binder       | 2 - 5                | 0                                                | 0                               | 0                                            |
| Additives                     | < 1                  | 0                                                | 0                               | 0                                            |
| Packaging Materials           | Weight, kg/ DU or FU | Weight -% (versus the product)                   |                                 |                                              |
| Wooden Pallet                 | 0.026                | 0.57%                                            |                                 |                                              |
| Polyethylene film             | 0.229                | 5.09%                                            |                                 |                                              |
| TOTAL                         | 0.255                | 5.66%                                            |                                 |                                              |

Declared Modules, geography, share of specific data (in GWP-GHG indicator) & data variation

Life cycle stages as defined in the European standard EN 15978 :2011 and the description of the system boundaries for the reference product LCA (X = included in the LCA, MND = module is not declared)

|                        | Product stage       |           |               | Construction process stage |                           | Use stage |             |        |             |               |                        |                       | End of life stage          |           |                  |          | Resource recovery stage |        |
|------------------------|---------------------|-----------|---------------|----------------------------|---------------------------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|----------------------------|-----------|------------------|----------|-------------------------|--------|
|                        | Raw material supply | Transport | Manufacturing | Transport                  | Construction installation | Use       | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | De-construction demolition | Transport | Waste processing | Disposal |                         |        |
| Module                 | A1                  | A2        | A3            | A4                         | A5                        | B1        | B2          | B3     | B4          | B5            | B6                     | B7                    | C1                         | C2        | C3               | C4       | D                       |        |
| Modules declared       | X                   | X         | X             | X                          | X                         | X         | X           | X      | X           | X             | X                      | X                     | X                          | X         | X                | X        | X                       | X      |
| Geography              | Europe              | Europe    | Europe        | Europe                     | Europe                    | Europe    | Europe      | Europe | Europe      | Europe        | Europe                 | Europe                | Europe                     | Europe    | Europe           | Europe   | Europe                  | Europe |
| Specific data used     | > 90 %              |           |               |                            |                           |           |             |        |             |               |                        |                       |                            |           |                  |          |                         |        |
| Variation** – products | <10 %               |           |               |                            |                           |           |             |        |             |               |                        |                       |                            |           |                  |          |                         |        |

\*Variation regarding the average EPD result in terms of GWP-GHG indicator

\*\*Variation regarding the average EPD result in terms of GWP-GHG indicator amongst products covered with this EPD



## Environmental performance

**Potential environmental impacts:** 1m<sup>2</sup> of Rock Mineral Wool PTS, TPE with a thickness of 150 mm and the R value of 0.83 m<sup>2</sup>K/W.

The results communicated is representable for all the products mentioned in this EPD.

| ENVIRONMENTAL IMPACTS |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |           |          |          |          |          |          |          |           |           |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------|----------|----------|----------|----------|----------|-----------|-----------|
| Parameter             | Unit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | A1-3***   | A4       | A5       | B1-B7    | C1       | C2       | C3       | C4        | D**       |
| GWP-fossil            | kg CO <sub>2</sub> eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 4.97E+00  | 3.02E-01 | 1.53E-01 | 0.00E+00 | 0.00E+00 | 1.77E-02 | 0.00E+00 | 6.80E-02  | -1.11E-01 |
| GWP-biogenic          | kg CO <sub>2</sub> eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | -3.48E-01 | 0.00E+00 | 2.39E-01 | 0.00E+00 | 0.00E+00 | 4.98E-11 | 0.00E+00 | -1.98E-03 | 1.68E-01  |
| GWP-luluc             | kg CO <sub>2</sub> eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1.35E-03  | 2.03E-03 | 7.30E-05 | 0.00E+00 | 0.00E+00 | 1.19E-04 | 0.00E+00 | 2.00E-04  | -1.14E-05 |
| GWP-total             | kg CO <sub>2</sub> eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 4.63E+00  | 3.04E-01 | 3.92E-01 | 0.00E+00 | 0.00E+00 | 1.78E-02 | 0.00E+00 | 6.63E-02  | 5.63E-02  |
| ODP                   | kg CFC 11 eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 9.48E-12  | 2.96E-14 | 2.45E-13 | 0.00E+00 | 0.00E+00 | 1.73E-15 | 0.00E+00 | 2.64E-16  | -8.10E-13 |
| AP                    | mol H <sup>+</sup> eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 5.07E-02  | 3.18E-04 | 1.08E-03 | 0.00E+00 | 0.00E+00 | 1.83E-05 | 0.00E+00 | 4.85E-04  | -1.72E-04 |
| EP-freshwater         | kg P eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 5.41E-06  | 1.08E-06 | 1.76E-07 | 0.00E+00 | 0.00E+00 | 6.29E-08 | 0.00E+00 | 1.14E-07  | -5.90E-07 |
| EP-marine             | kg N eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 3.06E-03  | 9.81E-05 | 8.01E-05 | 0.00E+00 | 0.00E+00 | 5.61E-06 | 0.00E+00 | 1.26E-04  | -5.19E-05 |
| EP-terrestrial        | mol N eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 3.36E-02  | 1.19E-03 | 9.28E-04 | 0.00E+00 | 0.00E+00 | 6.81E-05 | 0.00E+00 | 1.38E-03  | -5.59E-04 |
| POCP                  | kg NMVOC eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1.16E-02  | 3.05E-04 | 2.84E-04 | 0.00E+00 | 0.00E+00 | 1.75E-05 | 0.00E+00 | 3.81E-04  | -1.48E-04 |
| ADP-minerals&metals*  | kg Sb eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 3.59E-07  | 3.04E-08 | 9.16E-09 | 0.00E+00 | 0.00E+00 | 1.78E-09 | 0.00E+00 | 6.42E-09  | -1.63E-08 |
| ADP-fossil*           | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 7.39E+01  | 3.96E+00 | 1.69E+00 | 0.00E+00 | 0.00E+00 | 2.31E-01 | 0.00E+00 | 9.03E-01  | -2.03E+00 |
| WDP                   | m <sup>3</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 2.95E-01  | 3.37E-03 | 3.61E-02 | 0.00E+00 | 0.00E+00 | 1.97E-04 | 0.00E+00 | 7.30E-03  | -1.00E-02 |
| Acronyms              | GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption |           |          |          |          |          |          |          |           |           |

\* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

\*\* : [Life Cycle D stage covers benefits and loads beyond the system boundary stage (reuse, recovery and recycling potential) therefore, when summing up results, this stage should be considered separately].

\*\*\*: The indicators results are calculated with a reference product based on equal weight repartition between plants. The indicators results span between the reference product and the 100% sourced product from each dedicated plant may vary more than 10% (concerning A1- A3).

## Potential environmental impact – additional mandatory and voluntary indicators

The results communicated is representable for all the products mentioned in this EPD.

| Indicator   | Unit                   | Tot.A1-A3 | A4       | A5       | B1-B7    | C1       | C2       | C3       | C4       | D         |
|-------------|------------------------|-----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| GWP-GHG [2] | kg CO <sub>2</sub> eq. | 4.97E+00  | 3.02E-01 | 1.53E-01 | 0.00E+00 | 0.00E+00 | 1.77E-02 | 0.00E+00 | 6.78E-02 | -1.11E-01 |

[2] The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

**Use of resources:** 1m<sup>2</sup> of Rock Mineral Wool PTS, TPE with a thickness of 150 mm and the R value of 0.83 m<sup>2</sup>K/W.

The results communicated is representable for all the products mentioned in this EPD.

| RESOURCES USE |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |          |          |          |          |          |          |          |          |           |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| Parameter     | Unit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | A1-3***  | A4       | A5       | B1-B7    | C1       | C2       | C3       | C4       | D*        |
| PERE          | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 4.71E+00 | 2.74E-01 | 1.38E-01 | 0.00E+00 | 0.00E+00 | 1.60E-02 | 0.00E+00 | 1.22E-01 | -1.29E+00 |
| PERM          | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 3.44E+00 | 0.00E+00 | 6.88E-02 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| PERT          | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 8.14E+00 | 2.74E-01 | 2.07E-01 | 0.00E+00 | 0.00E+00 | 1.60E-02 | 0.00E+00 | 1.22E-01 | -1.29E+00 |
| PENRE         | MJ.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 6.95E+01 | 3.98E+00 | 1.62E+00 | 0.00E+00 | 0.00E+00 | 2.32E-01 | 0.00E+00 | 9.03E-01 | -2.03E+00 |
| PENRM         | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 4.41E+00 | 0.00E+00 | 6.62E-02 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| PENRT         | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 7.39E+01 | 3.98E+00 | 1.69E+00 | 0.00E+00 | 0.00E+00 | 2.32E-01 | 0.00E+00 | 9.03E-01 | -2.03E+00 |
| SM            | kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 1.27E+00 | 0.00E+00 | 2.54E-02 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| RSF           | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| NRSF          | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| FW            | m <sup>3</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 1.54E-02 | 3.17E-04 | 1.03E-03 | 0.00E+00 | 0.00E+00 | 1.85E-05 | 0.00E+00 | 2.23E-04 | -4.50E-04 |
| Acronyms      | PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water |          |          |          |          |          |          |          |          |           |

\*: [Life Cycle D stage covers benefits and loads beyond the system boundary stage (reuse, recovery and recycling potential) therefore, when summing up results, this stage should be considered separately].

\*\*\*: The indicators results are calculated with a reference product based on equal weight repartition between plants. The indicators results span between the reference product and the 100% sourced product from each dedicated plant may vary more than 10% (concerning A1- A3).

**Waste production and output flows: 1m<sup>2</sup> of Rock Mineral Wool PTS, TPE with a thickness of 150 mm and the R value of 0.83 m<sup>2</sup>K/W.**

*The results communicated is representable for all the products mentioned in this EPD.*

| OUTPUT FLOWS AND WASTE CATEGORIES |      |          |          |          |          |          |          |          |          |           |
|-----------------------------------|------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| Parameter                         | Unit | A1-3***  | A4       | A5       | B1-B7    | C1       | C2       | C3       | C4       | D*        |
| Hazardous waste disposed          | kg   | 5.49E-09 | 2.10E-11 | 1.25E-10 | 0.00E+00 | 0.00E+00 | 1.23E-12 | 0.00E+00 | 9.59E-11 | -2.61E-10 |
| Non-hazardous waste disposed      | kg   | 3.37E-01 | 6.48E-04 | 1.08E-01 | 0.00E+00 | 0.00E+00 | 3.78E-05 | 0.00E+00 | 4.50E+00 | -8.92E-04 |
| Radioactive waste disposed        | kg   | 3.02E-03 | 7.38E-06 | 7.03E-05 | 0.00E+00 | 0.00E+00 | 4.31E-07 | 0.00E+00 | 9.46E-06 | -1.23E-04 |
| Components for re-use             | kg   | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| Material for recycling            | kg   | 0.00E+00 | 0.00E+00 | 1.02E-01 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| Materials for energy recovery     | kg   | 0.00E+00 | 0.00E+00 | 1.53E-01 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| Exported energy, electricity      | MJ   | 0.00E+00 | 0.00E+00 | 4.29E-01 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| Exported energy, thermal          | MJ   | 0.00E+00 | 0.00E+00 | 7.70E-01 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |

*\*: [Life Cycle D stage covers benefits and loads beyond the system boundary stage (reuse, recovery and recycling potential) therefore, when summing up results, this stage should be considered separately].*

*\*\*\*: The indicators results are calculated with a reference product based on equal weight repartition between plants. The indicators results span between the reference product and the 100% sourced product from each dedicated plant may vary more than 10% (concerning A1- A3).*

| ADDITIONAL IMPACT CATEROGIES AND INDICATORS |                                                                                                                                                                                                                                             |          |          |          |          |          |          |          |          |           |
|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| Parameter                                   | Unit                                                                                                                                                                                                                                        | A1-3***  | A4       | A5       | B1-B7    | C1       | C2       | C3       | C4       | D*        |
| PM                                          | Disease Incidence                                                                                                                                                                                                                           | 3.67E-07 | 2.36E-09 | 7.79E-09 | 0.00E+00 | 0.00E+00 | 1.37E-10 | 0.00E+00 | 6.02E-09 | -1.25E-09 |
| IRP                                         | kBq U235 eq.                                                                                                                                                                                                                                | 2.19E-01 | 1.11E-03 | 5.98E-03 | 0.00E+00 | 0.00E+00 | 6.51E-05 | 0.00E+00 | 9.94E-04 | -2.06E-02 |
| ETP- fw                                     | CTUe                                                                                                                                                                                                                                        | 2.27E+01 | 2.81E+00 | 5.74E-01 | 0.00E+00 | 0.00E+00 | 1.64E-01 | 0.00E+00 | 5.15E-01 | -6.82E-01 |
| HTP-c                                       | CTUh                                                                                                                                                                                                                                        | 1.13E-09 | 5.78E-11 | 2.81E-11 | 0.00E+00 | 0.00E+00 | 3.38E-12 | 0.00E+00 | 7.59E-11 | -2.14E-11 |
| HTP- nc                                     | CTUh                                                                                                                                                                                                                                        | 3.75E-08 | 3.14E-09 | 1.14E-09 | 0.00E+00 | 0.00E+00 | 1.83E-10 | 0.00E+00 | 8.37E-09 | -9.08E-10 |
| SQP                                         | dimensionless                                                                                                                                                                                                                               | 5.72E+01 | 1.68E+00 | 1.21E+00 | 0.00E+00 | 0.00E+00 | 9.79E-02 | 0.00E+00 | 1.82E-01 | -2.93E-01 |
| Acronyms                                    | PM = Particulate matter emissions; IRP= Ionising radiation, human health; ETP-fw: Ecotoxicity (freshwater); ETP-c: Human toxicity, cancer effects; HTP-nc: Human toxicity, non-cancer effects; SQP: Land use related impacts / soil quality |          |          |          |          |          |          |          |          |           |

[Information on biogenic carbon content](#)

| Results per functional or declared unit |      |          |
|-----------------------------------------|------|----------|
| BIOGENIC CARBON CONTENT                 | Unit | QUANTITY |
| Biogenic carbon content in product      | kg C | 0.00E+00 |
| Biogenic carbon content in packaging    | kg C | 1.15E-01 |

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO<sub>2</sub>.

\*: [Life Cycle D stage covers benefits and loads beyond the system boundary stage (reuse, recovery and recycling potential) therefore, when summing up results, this stage should be considered separately]

\*\*\*: The indicators results are calculated with a reference product based on equal weight repartition between plants. The indicators results span between the reference product and the 100% sourced product from each dedicated plant may vary more than 10% (concerning A1- A3).

## LCA interpretation

### ENVIRONMENTAL IMPACTS

All impact categories, except the Abiotic Depletion Potential Element and the Ozone Depletion Potential, are dominated by the manufacturing processes. This can be explained by the huge impact of the energy use (electricity, natural gas and coke) for Rock Mineral Wool production.

**The Global Warming Potential (GWP-total)** is dominated by the manufacturing in the cupola, mostly due to CO<sub>2</sub> emissions from raw materials and energy consumption (50%).

**The Depletion Potential of the Stratospheric Ozone layer (ODP)** is mostly influenced by the manufacturing phase (module A1-A3) and significantly influenced using electricity.


**The Acidification Potential (AP)** is also dominated by the manufacturing due to the emissions related to the processes and the energy consumption.

**The Eutrophication Potential Fresh Water (all EP indicators in total)** is significantly influenced by the manufacturing due to emissions from cupola furnace, curing oven and other unit processes.

**The Formation Potential of Tropospheric Ozone (POCP)** is particularly dominated by the manufacturing (emissions in the cupola furnace and other unit processes).

**The Abiotic Depletion Potential for Non-Fossil Resources (ADP- minerals & metals)** impact mainly comes from the manufacturing of the product.

**The Abiotic Depletion Potential for Fossil Resources Potential (ADP-fossil)** is dominated by the use of coke as energy carrier. Next to the coke, we have also the impact of natural gas and upstream the electricity energy mix.

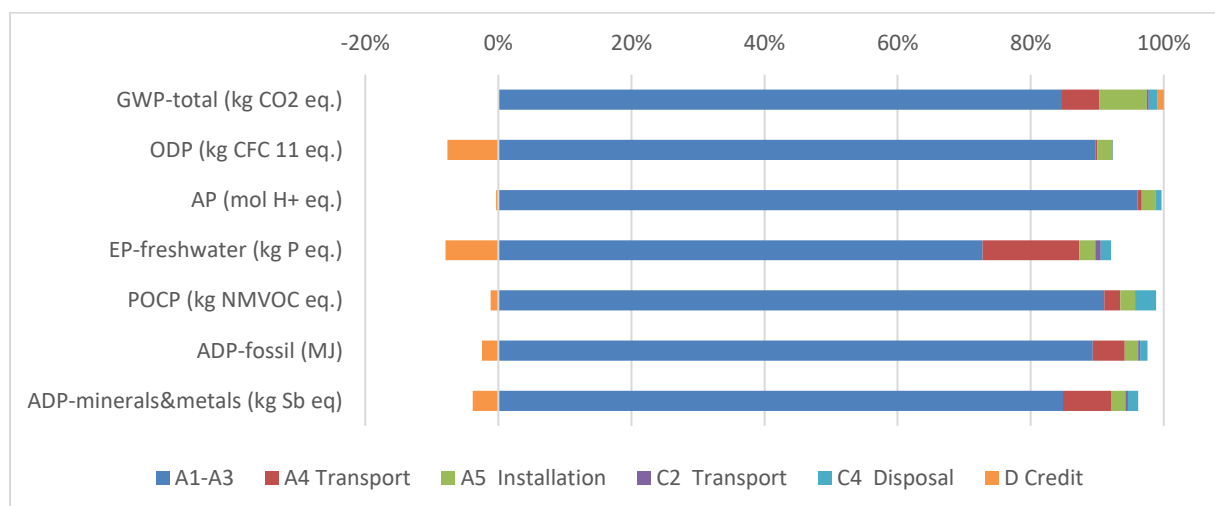

## RESOURCES USE

**Total Use of Non-Renewable Primary Energy Resources (PENRT)** is dominated by the manufacturing of Rock Mineral Wool products (especially due to the energy carrier, coke).

**Total Use of Renewable Primary Energy Resources (PERT)** is dominated by the manufacturing, mostly due to electricity consumption and packaging.

**For the Use of Secondary Material (SM)**, it consists of slags.

## References

### **International EPD® System**

General Programme Instructions of the International EPD® System. Version 3.01.

Product category rules (PCR): PCR 2019:14 v1.11. Construction products (EN 15804:A2) Version 1.0  
c-PCR-005 Thermal insulation products (EN 16783: 2017) Version: 2019-12-20

### **ISO 14025**

DIN EN ISO 14025:2011-10: Environmental labels and declarations — Type III environmental declarations — Principles and procedures

### **EN 15804**

EN 15804:2012+A2:2019: Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products

### **EN 16783:2017**

Thermal insulation products - Product category rules (PCR) for factory made and in-situ formed products for preparing environmental product declarations

### **GaBi 10.6**

GaBi 10.6: Software and database for life cycle engineering. LBP, University of Stuttgart and PE INTERNATIONAL AG, 2019.

### **DoP R4308KPCPR**

Declaration of Performance  
[www.dopki.com](http://www.dopki.com)

### **EN 1602**

EN1602: 2013 Thermal insulation products for building applications – Determination of the apparent density

### **EN 12667**

EN 12667: 2001 Thermal performance of building materials and products - Determination of thermal resistance by means of guarded hot plate and heat flow meter methods - Products of high and medium thermal resistance

### **EN 13162**

EN 13162:2012 Thermal insulation products for buildings - Factory made mineral wool (MW) products - Specification

### **EN 13501-1**

EN 13501-1: 2009 Fire classification of construction products and building elements - Part 1: Classification using test data from reaction to fire tests.

### **EN 12086**

EN 12086: 2013 Thermal insulating products for building applications –determination of water vapour transmission properties.

**EN 15978: 2011**

EN 15978: 2011 Sustainability of construction works - Assessment of environmental performance of buildings - Calculation method.

**ISO 8301:1991**

Thermal insulation — Determination of steady-state thermal resistance and related properties — Heat flow meter apparatus.

**ISO 21930:2017**

Sustainability in buildings and civil engineering works — Core rules for environmental product declarations of construction products and services

**DIN 4102-17**

Fire behaviour of building materials and building components - Part 17: Melting point of mineral wool insulating materials - Terms and definitions, requirements and test

**2022\_10\_25\_PTS\_TPE-NB (I-report)**

I-report is an interactive report created with GaBi based on the scenario. More details on the product characteristics, plant allocation and scenario can be found in the i-report.

**BR\_RMW\_2022 (Background Report)**

Calculation rules for the Life Cycle Assessment and Requirements and more details about the production on the Background Report.



## Contact information:

|                     |                                                                                                                                                                                                                                                                                                                                               |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EPD owner:          |  <p>Knauf Insulation<br/>Rue de Maestricht 95<br/>4600 Visé<br/>Belgium<br/><a href="http://www.knaufinsulation.com">www.knaufinsulation.com</a><br/>Contact: <a href="mailto:sustainability@knaufinsulation.com">sustainability@knaufinsulation.com</a></p> |
| LCA support:        |  <p>CO<sub>2</sub> Logic<br/>Cantersteen 47,<br/>1000 Brussels<br/>Belgium</p>  <p>Sphera<br/>Hauptstraße 111-113<br/>70771 Leinfelden-Echterdingen<br/>Germany</p>       |
| Programme operator: |  <p>EPD International AB<br/><a href="mailto:info@environdec.com">info@environdec.com</a></p>                                                                                                                                                              |
| Certification body  |  <p>Fabriksgatan 13<br/>41250 Göteborg,<br/>Sweden</p>                                                                                                                                                                                                     |