


TECHNICAL DATASHEET: BEST SIDEWALK PAVING

BEST.



TECHNICAL INFORMATION

2025/05

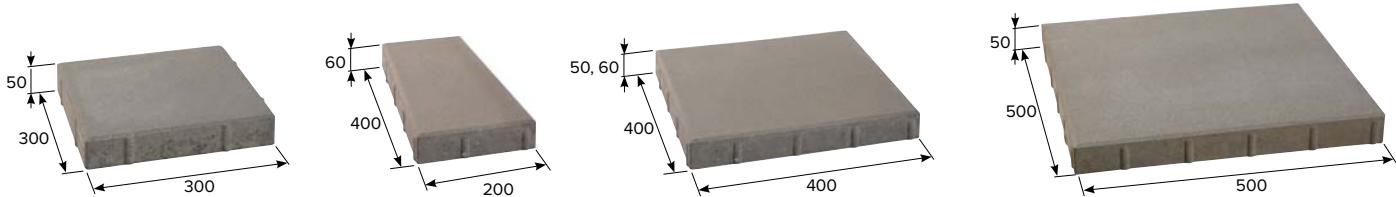

name	layout dimensions (mm)			number of pieces on the layer	consumption pcs/m ²	množství (m ²)		hmotnost (kg)			max. tonnage up to 24 t	
	height	length	width			layer	pallet	pcs	pallet	pallet included	pcs of pallets	m ²
BEST SIDEWALK PAVING	50	300	300	12	11,11	1,08	12,96	10,10	1454	1482	16	207,36
	50	400	400	6	6,25	0,96	11,52	17,90	1289	1317	18	207,36
	50	500	500	4	4,00	1,00	12,00	28,00	1344	1372	17	204,00
	60	400	400	6	6,25	0,96	11,52	23,00	1656	1684	14	161,28
	60	200	400	12	12,50	0,96	11,52	11,50	1656	1684	14	161,28

We are holders of the Gold Certificate for complete certification according to ISO 9001, ISO 14001, ISO 50001, ISO 45001. Our products are manufactured and inspected pursuant to European harmonized standards.

dimension	product height (mm)	production standard	maximum deviation from declared production dimensions (mm)		deviations from flatness and curvature (mm)			bending strength (MPa)	skid/slip resistance	ČSN 73 1326, weather resistance, method A (kg/m ² after 100 cycles)
			width and length	height	length of gauge	max. convexity	max. concavity			
300x300	50	ČSN EN 1339	±2	±3	300	1,5	1,0	≥4	satisfactory	≤1,0
400x400	50	ČSN EN 1339	±2	±3	400	2,0	1,5	≥4	satisfactory	≤1,0
500x500	50	ČSN EN 1339	±2	±3	500	2,5	1,5	≥4	satisfactory	≤1,0
400x400	60	ČSN EN 1339	±2	±3	400	2,0	1,5	≥4	satisfactory	≤1,0
400x200	60	ČSN EN 1339	±2	±3	400	2,0	1,5	≥4	satisfactory	≤1,0

The declared production dimensions (length and width) are always smaller than assembled dimensions. Production dimensions (length and width) are listed without spacers, which are generally 3 mm smaller than assembled dimensions.

EXPLANATIONS OF PICTOGRAMS



Paving designed for sidewalks, bicycle paths and non-motorized traffic.



Surface basic



Q SAVE
protection system



Facet
classic



A pallet fee
is charged

TECHNICAL DATASHEET: BEST SIDEWALK PAVING

BEST.

SURFACE FINISHES AND COLOURS



NATURAL



COLORMIX ARABICA



COLORMIX BRILANT



COLORMIX ETNA



COLORMIX SAND

surface	characteristics	colour
STANDARD	standard surface with natural aggregate roughness corresponding to the visible layer of concrete paving	natural, colormix arabica, colormix brilant, colormix etna, colormix sand

GENERAL INFORMATION

Two-layer vibrated paving with high strength, frost resistance, surface resistance to water and chemical de-icing agents. The paving has low abrasion and good adhesion properties. BEST concrete elements are permanently impregnated against contamination.

Minimum shipping quantity is 1 layer (each stone dimension separately), stones cannot be shipped as single units. The goods are loaded on marked pallets BEST (25 kg) or BEST large (28 kg) according to the production capacity of individual plants.

When laying, it is important to follow the correct procedure according to the instructions for use (best.cz). The pavement can be laid in a gravel bed or on rubber or plastic targets (also available from BEST).

Caution: We do not recommend to compact the BEST SIDEWALK PAVING paving with a vibrating plate; the correct seating of the pavement on the subfloor is ensured by tapping with a rubber stick over a wooden board.

